

os3155

Optical Strain Gage


The os3155 is a rugged optical strain gage with integrated temperature compensation based on fiber Bragg grating (FBG) technology.

Optimized for outdoor installations on steel structures, the os3155's stainless steel carrier holds the FBG in tension and protects the fiber during installation. Since there are no epoxies holding the fiber to the carrier, long term stability is ensured by design. The design is similar to the os3150 rugged strain gage but the os3155 includes a second FBG which provides active temperature compensation. The benefits of this approach include both more accurate temperature compensation (since the strain and temperature measurements are made in close proximity) and lower-cost installation (by reducing the need for additional cables, splices and handling to connect additional temperature gages).

The sensors can be installed in just a few minutes. Since the gages are welded in place, they can be used immediately after attachment without waiting for adhesives to cure. Armored cables lead to and from each gage, making both installation and fiber protection fast and easy. Optional protection fittings help prevent damage to series connections even in harsh environments. This enables fast reliable field connections to other optical strain, acceleration or temperature sensors on the same fiber. The entire strain gage package is typically covered with a protective material to complete installation for long term protection.

In side by side comparisons with foil strain gages, the os3155 is equally sensitive and accurate, while providing for greater strain range and 100 times more fatigue life. The os3155 strain gage is qualified for use in harsh environments and delivers the many advantages inherent to all FBG based sensors.

This sensor can be used alone or in series as a part of an FBG sensor array. Installation and cabling for such arrays is much less expensive and cumbersome than comparable electronic gage networks. Multiple optical strain gages can be arranged in close proximity at 0, 45 and 90 degrees for strain rosette measurements.

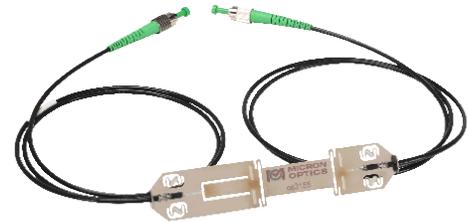

Key Features

Rugged, permanent weldable package.

Temperature compensation sensor integrated inside. Measurement of relative temperature for compensation of strain measurements.

Close proximity of strain FBG to temperature FBG improves accuracy of strain measurement.

Armored cable integrated with sensor package for fiber protection and strain relief.

Fast, simple, repeatable installation. Double ended design supports multiplexing of many sensors on one fiber.

Qualified to same rigorous standards used for comparable electronic gages.

Gage installation and protection achieved with same methods as conventional electronic gages.

Micron Optics' patented micro opto-mechanical technology.

Included in ENLIGHT's sensor templates - allows for quick and easy optical to mechanical conversions.

Applications

Structures (bridges, dams, tunnels, mines, buildings, oil platforms)

Energy (wind turbines, oil wells, pipelines, nuclear reactors, generators)

Transportation (railways, trains, roadways, specialty vehicles, cranes)

Marine vessels (hull, deck, cargo containers)

Aerospace (airframes, composite structures, wind tunnels, static and dynamic tests).

Properties

Performance Properties		os3155	
Strain Sensitivity ¹		~ 1.2 $\mu\text{m}/\mu\epsilon$	
Gage Length		50 mm	
Operating Temperature Range		-40 to 80° C	
Strain Limits		$\pm 2,500 \mu\epsilon$	
Fatigue Life		100 x 10 ⁶ cycles, $\pm 2,000 \mu\epsilon$	
Physical Properties			
Dimensions (mm)		See Diagram Below	
Weight		17 g	
Carrier Material		302 Stainless Steel	
Cable type / length		1 m (± 10 cm), each end	
Fiber type		SMF-28	
Connectors		FC/APC and Connector Protection Fitting Optional	
Cable Bend Radius		≥ 17 mm	
Fastening Methods ²		Spot Weld	Epoxy Mount
Optical Properties			
Peak Reflectivity (Rmax)		$> 70\%$	
FWHM (- 3 dB point)		0.25 nm ($\pm .05$ nm; apodized grating)	
Isolation		> 15 dB (@ ± 0.4 nm around center wavelength)	


Ordering Information

os3155-tttt/ssss-1xx-1yy

tttt/ssss Strain/Temp Wavelengths (+/- 1nm)
 Standard - 1462/1466, 1472/1476, 1482/1486, 1492/1496, 1502/1506, 1512/1516, 1522/1526, 1532/1536, 1542/1546, 1552/1556, 1562/1566, 1572/1576, 1582/1586, 1592/1596, 1602/1606, 1612/1616

xx Termination Type
 1xx Cable 1, Length and Connector
 1 1 m Standard, Cable Length
 UT Underterminated
 FC FC/ACP Connector
 PF FC/ACP Connector with Protection Fitting

yy Termination Type
 1yy1 Cable 2, Length & Connector
 1 1m Standard, Cable Length
 UT Underterminated
 FC FC/ACP Connector
 PF FC/ACP Connector with Protection Fitting

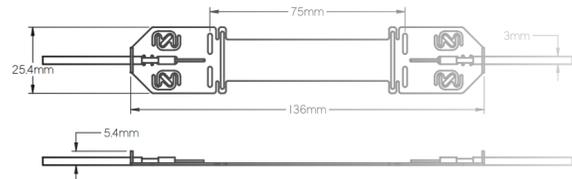

Ordering Information Example

o3155-1512/1516-1FC-1FC

Notes

1 Actual gage factor provided with gage.

